
KW Trams

KW 002d Wolverhampton 8 Open Top



Build Steps

1. Fix bulk heads to sides squarely and marry all subassemblies to produce a box effect

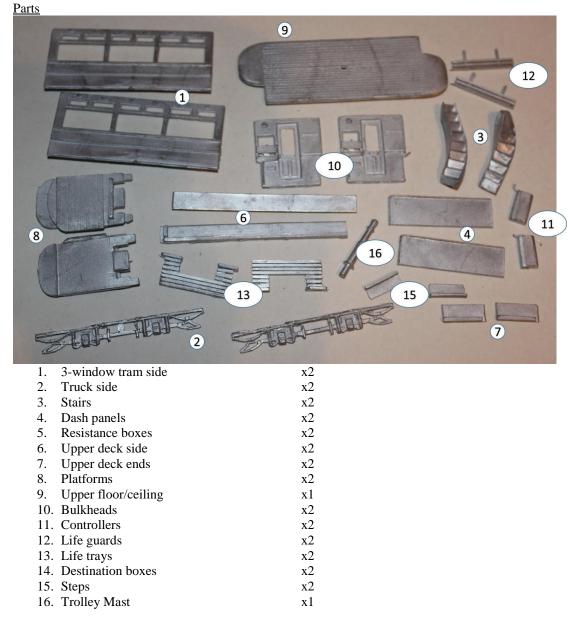


- 2. With model inverted, attach platforms to bottom edges of bulkheads; ensuring the lip is within the body and not on the platform.
- 3. Bend the dash panels if supplied flat, to fit the curve of the platform, trim to length and fit to platform.



- 4. Fix the ceiling/upper deck floor piece
- 5. Attach upper deck sides and ends to the floor. File down the corners to make a curve.



- 6. Paint the interior and window edges and then glaze.
- 7. Attach destination boards, destination letter boxes and headlights as required.
- 8. Fix the controllers inside the dash panels just left of centre, and a piece of fine wire bent into handle will serve as the brake and that goes to the right so the driver would have one in either hand.
- 9. Turn model over and attach truck sides to body sides ensuring exact centrality
- 10. Fix steps, life guards under the front panels and the life trays attached to the front edge of the truck sides so they do not interfere with the mechanism.

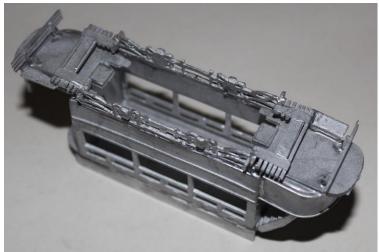

11. Fit the stairs, resistance boxes under the stairs and trolley mast



Make upper deck rails and hand rails from fine wire.
Fix destination boxes to upper deck railings.

